




Crimping Tool

RYO-2 TERMINAL CRIMPING TOOL

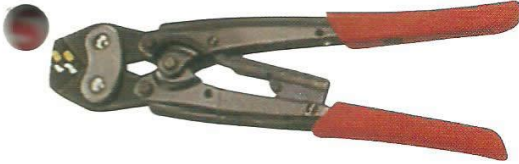


Non insulated terminal range: 1.25, 2 mm².
Copper tube terminal range: 1.5, 2.5 mm².
Length: 200 mm Weight: 0.23 kgs

RYO-38 TERMINAL CRIMPING TOOL



Non insulated terminal range: 5.5, 8, 14, 22, 38 mm².
Copper tube terminal range: 6, 10, 16, 25, 35, 50 mm².
Length: 370 mm Weight: 0.8 kgs

RYO-8 TERMINAL CRIMPING TOOL

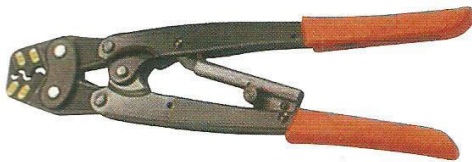

Non insulated terminal range: 1.25, 2, 3.5, 5.5, 8 mm².
Copper tube terminal range: 1.5, 2.5, 4, 6, 10 mm².
Length: 270 mm Weight: 0.48 kgs

CT-38 TERMINAL CRIMPING TOOL



Non insulated terminal range: 8, 14, 22, 38 mm².
Copper tube terminal range: 10, 16, 25, 35, 50 mm².
Length: 580 mm Weight: 3.3 kgs

RYO-14 TERMINAL CRIMPING TOOL




Non insulated terminal range: 1.25, 2, 3.5, 5.5, 8, 14 mm².
Copper tube terminal range: 1.5, 2.5, 4, 6, 10, 16 mm².
Length: 298 mm Weight: 0.52 kgs

CT-60 TERMINAL CRIMPING TOOL



Non insulated terminal range: 14, 22, 38, 60 mm².
Copper tube terminal range: 16, 25, 35, 50, 70 mm².
Length: 580 mm Weight: 3.3 kgs

RYO-25 TERMINAL CRIMPING TOOL

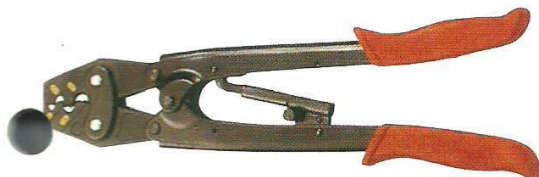

Non insulated terminal range: 5.5, 8, 14, 22 mm².
Copper tube terminal range: 6, 10, 16, 25, 35 mm².
Length: 354 mm Weight: 0.78 kgs

CT-80 TERMINAL CRIMPING TOOL



Non insulated terminal range: 14, 22, 38, 60, 70, 80 mm².
Copper tube terminal range: 16, 25, 35, 50, 70, 95 mm².
Length: 660 mm Weight: 4.34 kgs

CT-100 TERMINAL CRIMPING TOOL



Non insulated terminal range: 22, 38, 60, 70, 80, 100 mm².
Copper tube terminal range: 25, 35, 50, 70, 95, 120 mm².
Length: 660 mm Weight: 4.34 kgs

RYO-120 TERMINAL CRIMPING TOOL




Heavy duty crimping tool for copper tube terminal from 10 to 120 mm² with non-ratchet screw adjustment.
Non insulated terminal range: 8, 14, 22, 38, 60, 70, 80, 100 mm².
Copper tube terminal range: 10, 16, 25, 35, 50, 70, 95, 120 mm².
Length: 573 mm Weight: 2.78 kgs

RYO-150 TERMINAL CRIMPING TOOL



Heavy duty crimping tool for copper tube terminal from 10 to 150 mm² with non-ratchet screw adjustment.
Non insulated terminal range: 8, 14, 22, 38, 60, 70, 80, 100, 125, 150 mm².
Copper tube terminal range: 10, 16, 25, 35, 50, 70, 95, 120, 150 mm².
Length: 670 mm Weight: 3.9 kgs

K-120
TERMINAL HEXAGONAL CRIMPING TOOL

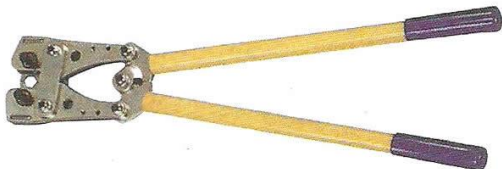


Copper tube terminal range: 10, 16, 25, 35, 50, 70, 95, 120 mm².
Length: 660 mm Weight: 3 kgs

RYO-056
INSULATED TERMINAL CRIMPING TOOL



Insulated terminal range: 0.5-1 mm² (22-18 AWG), 1.5-2.5 mm² (16-14 AWG), 4-6 mm² (12-10 AWG).
Length: 225 mm Weight: 0.55 kgs

RYO-B056
OPEN BARREL TERMINAL CRIMPING TOOL

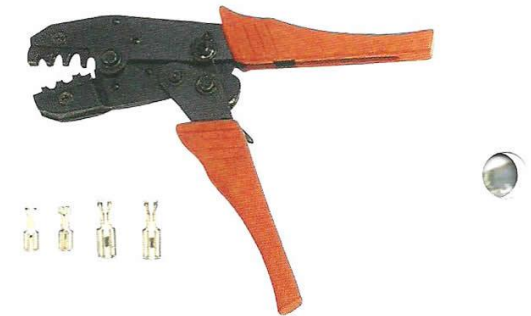

Open barrel terminal range: 0.5-1 mm² (22-18 AWG), 1.5-2.5 mm² (16-14 AWG), 4-6 mm² (12-10 AWG).
Length: 225 mm Weight: 0.55 kgs

RCE-056
CORD END TERMINAL CRIMPING TOOL




Cord end terminal range: 0.5-0.75 mm² (22-20 AWG), 1 mm² (18 AWG), 1.5 mm² (16 AWG), 2.5 mm² (14 AWG), 4 mm² (12 AWG), 6 mm² (10 AWG).
Length: 225 mm Weight: 0.55 kgs

RCE-416
CORD END TERMINAL CRIMPING TOOL




Cord end terminal range: 4 mm² (12 AWG), 6 mm² (10 AWG), 10 mm² (8 AWG), 16 mm² (6 AWG).
Length: 225 mm Weight: 0.55 kgs

RYC-250 CABLE CUTTER

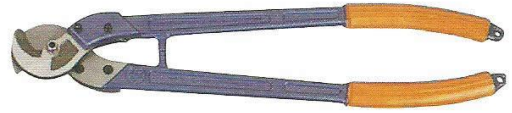

For cutting copper and aluminum cable up to 250 mm².
Length: 600 mm Weight: 1.7 kgs

RYC-400 CABLE CUTTER

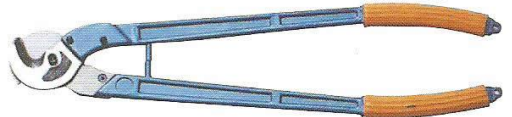

For cutting copper and aluminum cable up to 400 mm².
Length: 700 mm Weight: 2.1 kgs

RYC-500 CABLE CUTTER




For cutting and aluminum cable up to 500 mm².
Length: 800 mm Weight: 2.9 kgs

RYC-38 CABLE CUTTER




For cutting copper and aluminum cable up to 38 mm².
Length: 210 mm Weight: 0.3 kgs

RYC-60 CABLE CUTTER

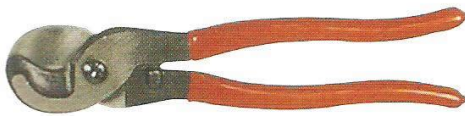


For cutting copper and aluminum cable up to 60 mm².
Length: 238 mm Weight: 0.51 kgs

RYC-100 CABLE CUTTER

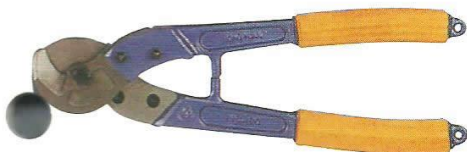

For cutting copper and aluminum cable up to 100 mm².
Length: 315 mm Weight: 0.7 kgs

RCC-325
RATCHETING CABLE CUTTER

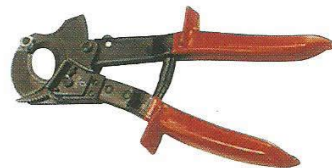

For cutting copper and aluminum cable up to 325 mm².
Length: 255 mm Weight: 0.6 kgs

RCC-500
RATCHETING CABLE CUTTER




For cutting copper and aluminum cable up to 500 mm².
Length: 235 mm Weight: 0.93 kgs

RCC-520
RATCHETING CABLE CUTTER




For cutting copper and aluminum cable up to 500 mm².
Length: 400 mm Weight: 1.6 kgs

M-42 PVC PIPE CUTTER

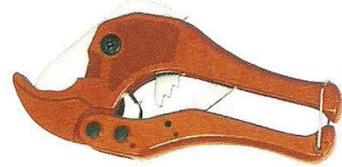


For cutting pvc pipe up to 1 1/4" (42.7 mm).
Length: 207 mm Weight: 0.38 kgs

SCC-60 STEEL WIRE ROPE CUTTER

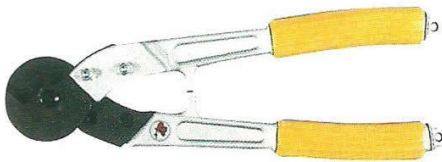


For cutting steel wire rope up to 7 mm.
Mild steel rod up to 5 mm.
Copper and aluminum cable up to 60 mm².
Length: 310 mm Weight: 0.7 kgs

L-63 PVC PIPE CUTTER

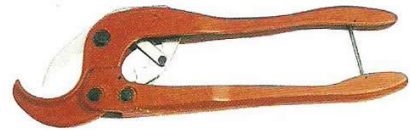

For cutting pvc pipe up to 2" (60.5 mm)
Length: 435 mm Weight: 1.16 kgs

SCC-200 STEEL WIRE ROPE CUTTER

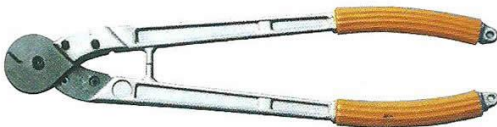

For cutting steel wire rope up to 14 mm.
Mild steel rod up to 9 mm.
Copper and aluminum cable up to 150 mm².
Length: 600 mm Weight: 1.7 kgs

KTS-100 PVC PIPE CUTTER



The design of the ratchet mechanism on the cutting blade gives a smooth cutting action with minimum effort.
For cutting pvc pipe up to 35 mm.
Length: 190 mm Weight: 0.53 kgs

S-25 PVC PIPE CUTTER



For cutting pvc pipe up to 1" (34 mm).
Length: 197 mm Weight: 0.27 kgs

KTS-35 PVC PIPE CUTTER



This cutter is specially designed to enable the cutting of pvc pipe in an overhead position. The cutting blade is easily replaced or cleaned without opening the body of the cutter.
For cutting pvc pipe up to 35 mm.
Length: 250 mm Weight: 0.53 kgs

KTS-35/50 PVC PIPE CUTTER



The cutter is designed for cutting most pvc pipe up to 50 mm outside diameter.
The push-button enables the selection of cutting positions suitable for pipes of 6-35 mm outside diameter.
This design allows rapid cutting of smaller diameter pipes.
Length: 265 mm Weight: 0.55 kgs

WT-1 WIRE DUCT CUTTER



For cutting telephone wire duct, wire duct and cable tie.
Length: 210 mm Weight: 0.3 kgs

RHC-37A HOSE CUTTER



BODY: DIE-CAST ALUMINUM ALLOY
CAPACITY: 6-37 mm O. D. (1 1/4", I. D.)
Length: 215 mm Weight: 0.16 kgs

WD-1 WIRE DUCT CUTTER



For cutting telephone wire duct, wire duct and cable tie.
Length: 200 mm Weight: 0.2 kgs

RHC-58 HOSE CUTTER



BODY: NYLON #6 + 20% FIBER-GLASS
CAPACITY: 6-58 mm O. D. (2", I. D.)
Length: 240 mm Weight: 0.09 kgs

CS-0416 CS-0828 CS-0828K WIRE STRIPPER



MODEL	APPLICATION
CS-0416	4-16 mm
CS-0828	8-28 mm
CS-0828K	8-28 mm

RHC-80 HOSE CUTTER




BODY: NYLON #6 + 20% FIBER-GLASS
CAPACITY: 6-80 mm O. D. (3", I. D.)
Length: 265 mm Weight: 0.13 kgs

CS-0425 ROTARY CABLE STRIPPER



For cable out diameter from 4-25 mm.
Length: 136 mm Weight: 0.15 kgs

A.B.E TYPE WIRE STRIPPER

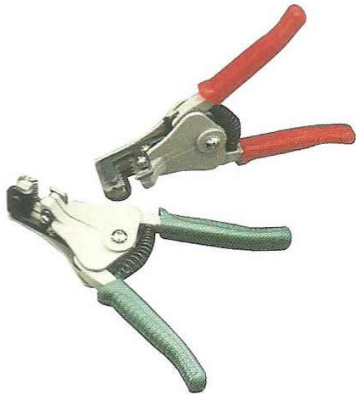

MODEL	APPLICTATION
A	0.5, 1.2, 1.6, 2.0 mm
B	1.0, 1.6, 2.0, 2.6, 3.2 mm
E	0.5, 1.2, 1.6, 2.0, 2.6, 3.2 mm

Length: 160 mm Weight: 0.26 kgs


**CPB-19.25.31
E.M.T. PIPE HAND BENDER TOOL**



CPB-19 CPB-25 CPB-31

MODEL	APPLICTATION
CPB-19	1/2" (17.9 mm)
CPB-25	3/4" (23.4 mm)
CPB-31	1" (29.5 mm)


AS-10 AVIATION TIN SNIP

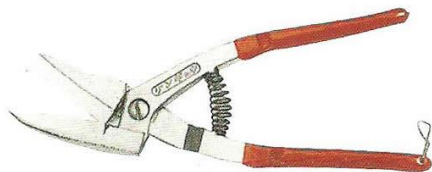

Drop forged high quality chrome vanadium steel blade with serrated edged slip quard PVC grips. With safety latch.

Length: 225 mm Weight: 0.35 kgs


CP-700 HYDRAULIC HAND PUMP

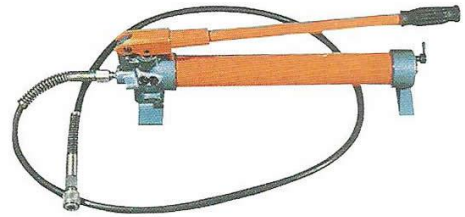

Hydraulic hand pump with two stage speed action. Pump releas 700 kg/cm² (10,000 psi) pressure achieved.

Hose: 2 m Capacity: 900 c.c. Weight: 9 kgs

CFP-800 HYDRAULIC FOOT PUMP

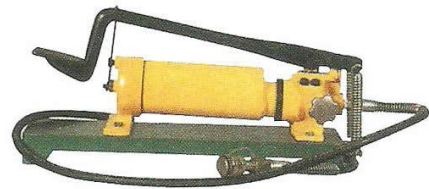

Hydraulic foot pump with two stage speed action. Pump releas 700 kg/cm² (10,000 psi) pressure achieved.

Hose: 2 m Capacity: 1200 c.c. Weight: 18 kgs

**CO-325A (CO-400A)
HYDRAULIC CRIMPING TOOL**



The function of the product must be applied combine with pump.

With indent die set for non insulated terminal 8-325 mm², copper tube terminal 10-400 mm².

Indent die include 3 pcs: 8-38 mm² (10-70 mm²), 60-100 mm² (95-150 mm²), 150-325 mm² (185-400 mm²).

Supporter die include 9 pcs: 8-14 mm² (10-25 mm²), 35 mm² (35 mm²), 38 mm² (50-70 mm²), 60-70 mm² (95 mm²), 80 mm² (120 mm²), 100 mm² (150 mm²), 150-180 mm² (185-240 mm²), 200 mm² (300 mm²), 325 mm² (400 mm²).

Weight: 6 kgs

CO-325B (CO-400B)
HYDRAULIC CRIMPING TOOL




The function of the product must be applied combine with pump.

With 9 of hexagonal die set for non insulated terminal 8-325 mm², copper tube terminal 10-400 mm².

Die set include: 8-14 mm² (10-25 mm²), 22 mm² (35 mm²), 38 mm² (50-70 mm²), 60-70 mm² (95 mm²), 80 mm² (120 mm²), 100 mm² (150 mm²), 150-180 mm² (185-240 mm²), 200 mm² (300 mm²), 325mm² (400 mm²).

Weight: 8 kgs

CPO-325A (CPO-400A)
HYDRAULIC CRIMPING TOOL

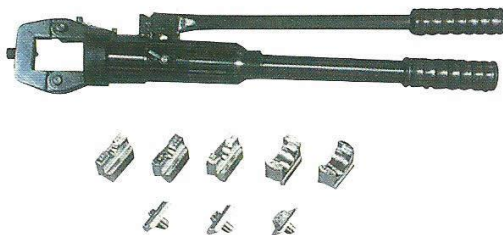

With a two stage speed action for use.


With indent die set for non insulated terminal 8-325 mm², copper tube terminal 10-400 mm².

Indent die include 3 pcs: 8 -38 mm² (10-70 mm²), 60-100 mm² (95-150 mm²), 150-325 mm² (185-400 mm²).

Supporter die include 9 pcs: 8-14 mm² (10-25 mm²), 22 mm² (35 mm²), 38 mm² (50-70 mm²), 60-70 mm² (95 mm²), 80 mm² (120 mm²), 100 mm² (150 mm²), 150-180 mm² (185-240 mm²), 200 mm² (300 mm²), 325 mm² (400 mm²).

Output: 20 ton Weight: 13 kgs

CPO-325B (CPO-400B)
HYDRAULIC CRIMPING TOOL

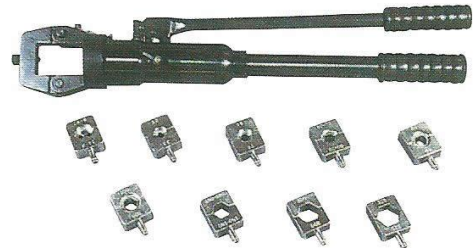


With a two stage speed action for use.

With 9 of hexagonal die set for non insulated terminal 8 -325 mm², copper tube terminal 10-400 mm².

Die set include: 8-14 mm² (10-25 mm²), 22 mm² (35 mm²), 38 mm² (50-70 mm²), 60-70 mm² (95mm²), 80 mm² (120 mm²), 100 mm² (150 mm²), 150-180 mm² (185-240 mm²), 200 mm² (300 mm²), 325 mm² (400 mm²).

Output: 20 ton Weight: 14 kgs

CO-630 HYDRAULIC CRIMPING TOOL

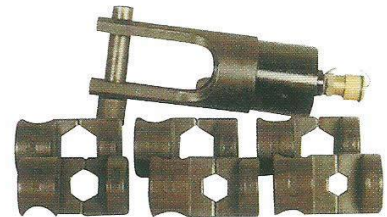

The function of the product must be applied combine with pump.

With 6 of hexagonal die set for copper tube terminal 150-630mm².

Die set include: 150-185 mm², 240 mm², 300 mm², 400 mm², 500 mm², 630 mm².

Weight: 13 kgs

CO-630A HYDRAULIC CRIMPING TOOL



The function of the product must be applied combine with pump.

With hexagonal die set for copper tube terminal to 630 mm².

Die set include: 630 mm².

Weight: 20 kgs